

(43) International Publication Date 7 April 2005 (07.04.2005)

PCT

(10) International Publication Number WO 2005/031968 A1

(51) International Patent Classification7:

H03F 1/33

(21) International Application Number:

PCT/KR2004/002465

(22) International Filing Date:

24 September 2004 (24.09.2004)

(25) Filing Language:

Korean

(26) Publication Language:

English

(30) Priority Data: 10-2003-0067740

30 September 2003 (30.09.2003) KR

- (71) Applicants and
- (72) Inventors: LEE, Jong-Ryul [KR/KR]; 107-13, Yeok-gok 1(il)-Dong, Wonmi-Gu, Bucheon-Si, Gyeonggi-Do 420-835 (KR). LEE, Jong-Seok [KR/KR]; 220-10, Chunui-Dong, Wonmi-Gu, Bucheon-Si, Gyeonggi-Do 420-857 (KR).
- (74) Agent: GAIN INTERNATIONAL PATENT & LAW FIRM; Ace Tower 5sec, Room No. 205, 197-22, Gurodong, Guro-gu, Seoul 152-766 (KR).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: INPUT/OUTPUT SIGNALS PRESERVER CIRCUIT OF AMPLIFICATION CIRCUITS

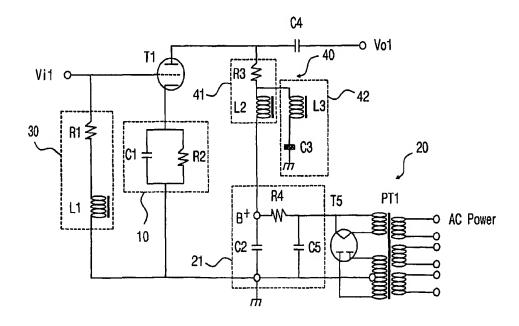

(57) Abstract: The present invention relates to an input and output signal preservation circuit of an amplification circuit capable of preventing an attenuation of an input signal and an output signal of an amplification circuit in such a manner that an AC input signal is amplified using an amplification device such as a vacuum tube or a transistor in a preamplifier.

Best Available Copy

2005/031968 A1

Best Available Copy

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.